


MODEL 4 CIRCULAR

The Model 4 incorporates lightweight aluminum housing and is configured with a universal adapter. The circular lamp provides a 360° of uniform, shadow-free illumination on a targeted area. One circular fluorescent lamp provides a high frequency (25 kHz) light. The unit comes standard with a deluxe daylight (5100K) bulb, but can also be fitted with a black light (UV) bulb as well as different wavelength colors. This is a low profile unit, only 1.83" (46.5mm) high.

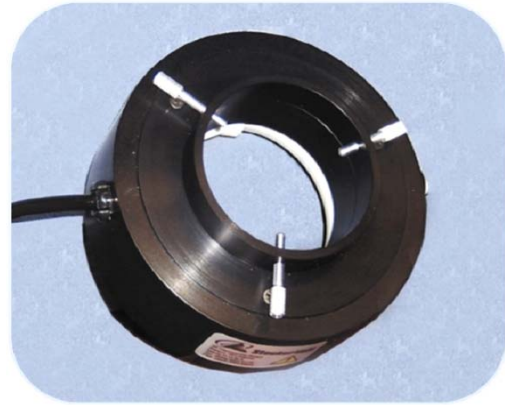

To figure out the Part Number of the Model 4 [Click here](#).
For the dimensions of the Model 4 [Click here](#).

Features


- True circular, low-profile, rugged housing
- High frequency, flicker-free illumination
- Uniform, glare-free, shadow-free illumination
- Versatile mounting options
- Over 7000 hours of lamp life

Replacement Bulbs	
904-510	Deluxe Daylight, 5100K
904-365	Black Light Blue (UV), 365nm
904-450	Blue, 450nm
904-658	Red, 658nm

Specifications	
Housing Range:	0% to 80%; non-condensing
Input Power:	18 watts
Lamp Output Power:	16 watts
Operating Frequency:	25 kHz
Input Frequency:	50Hz/60Hz
Operating Temp:	0°C to 40°C (32°F to 104°F)



MODEL 4 PART NUMBER MATRIX

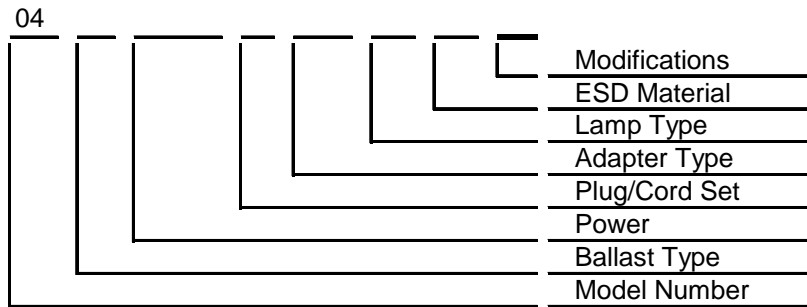

Model:	04	Model 4		
Ballast Type:	P	Plug-In 25kHz (115VAC w/ K-plug <u>Only</u>)		
	D	Direct (In-Line) 25kHz (115 or 220 VAC)		
	S	Sealed 85kHz (power Options 3 & 4 Only)		
Power:	1	115VAC, 60HZ		
	2	220VAC, 50Hz		
	3	Universal w/ fixed intensity (90VAC-254VAC; 50/60HZ)		
	4	Universal w/ variable intensity control		
Cord Sets:	B	Euro/Shuko	I	Italy
	C	Australia	K	North America (Plug-In or In-Line)
	D	United Kingdom	L	Switzerland
	E	Denmark	R	Russia
	F	France/Belgium	X	No Plug (In-Line Style Only)
	G	India	Z	North America (220VAC, NEMA 6-15P)
	H	Israel		
Adapter Type:	300	No Adapter (supplied w/ 3 #4-40 PEM inserts)		
	310	#310 Universal Adapter (#30747404); 2.40" (60.96mm) I.D.		
Lamp Type:	51	White, 5100K Deluxe Daylight		
	BB	Black Light Blue (UV), 365nm		
	BL	Blue, 450nm		
	RD	Red, 658nm		
ESD Matl.:	Blank	Standard material		
Modifications:	t.b.d. (Consult KSE-Texas for available options or customization)			

