


# MODEL 4 PART NUMBER MATRIX



Model:	04	Model 4	
Ballast Type:	P	Plug-In 25kHz (115VAC w/ K-plug Only)	
	D	Direct (In-Line) 25kHz (115 or 220 VAC)	
	S	Sealed 85kHz (power Options 3 & 4 Only)	
Power:	1	115VAC, 60HZ	
	2	220VAC, 50Hz	
	3	Universal w/ fixed intensity (90VAC-254VAC; 50/60HZ)	
	4	Universal w/ variable intensity control	
Cord Sets:	B	Euro/Shuko	I Italy
	C	Australia	K North America (Plug-In or In-Line)
	D	United Kingdom	L Switzerland
	E	Denmark	R Russia
	F	France/Belgium	X No Plug (In-Line Style Only)
	G	India	Z North America (220VAC, NEMA 6-15P)
	H	Israel	
Adapter Type:	300	No Adapter (supplied w/ 3 #4-40 PEM inserts)	
	310	#310 Universal Adapter (#30747404); 2.40" (60.96mm) I.D.	
Lamp Type:	51	White, 5100K Deluxe Daylight	
	BB	Black Light Blue (UV), 365nm	
	BL	Blue, 450nm	
	RD	Red, 658nm	
ESD Matl.:	Blank	Standard material	
Modifications:	t.b.d. (Consult KSE-Texas for available options or customization)		

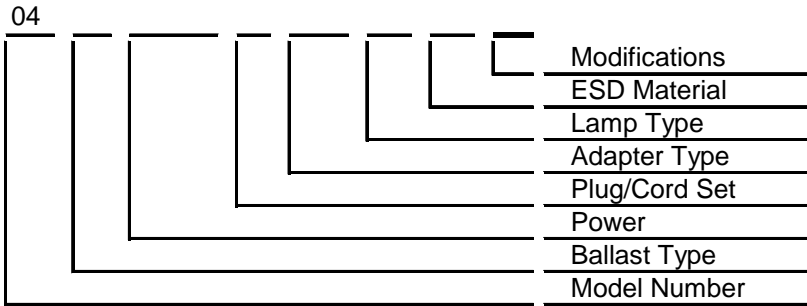